


Correntes de Rolo – Norma ASA

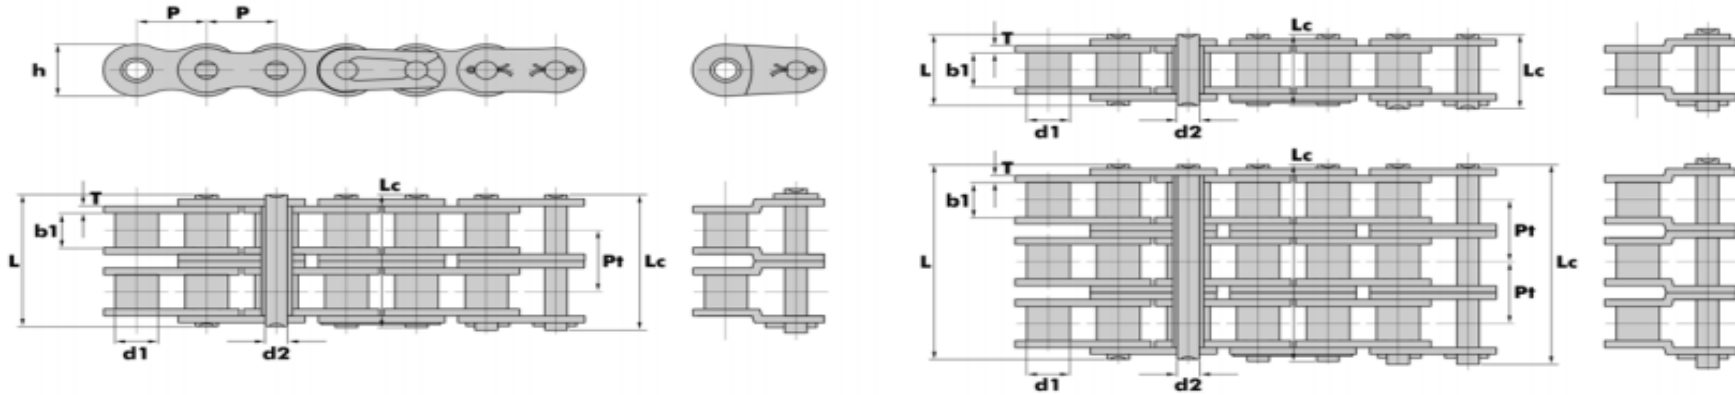

Dimensões em mm

Referência		Passo P	Diâmetro do Rolo máx. d1	Largura entre Placas mín. b1	PINO			PLACA		Passo Transversal kgf ANSI	Carga de Ruptura máx. kgf	Peso kg/m
ANSI	ISO e ABNT				Diâme- tro d2	Compri- mento L	Compri- mento Lc	Altura h	Espes- sura T			
25-1	04 A-1	6,35	3,30	3,18	2,31	7,90	8,40	6,00	0,80	-----	350	0,15
25-2	04 A-2					14,50	15,00			6,40	700	0,28
25-3	04 A-3					21,00	21,50			6,40	1050	0,44
25-4	04 A-4					27,20	28,60			6,40	1440	0,52
35-1	06 A-1	9,525	5,08	4,77	3,58	12,40	13,17	9,00	1,30	-----	790	0,33
35-2	06 A-2					22,50	23,30			10,13	1580	0,63
35-3	06 A-3					32,70	33,50			10,13	2370	1,05
35-4	06 A-4					47,30	43,50			10,13	3200	1,41
40-1	08 A-1	12,70	7,95	7,85	3,96	16,60	17,80	12,00	1,50	-----	1410	0,62
40-2	08 A-2					31,00	32,20			14,38	2820	1,12
40-3	08 A-3					45,40	46,60			14,38	4230	1,90
40-4	08 A-4					60,00	61,00			14,38	5628	2,37
50-1	10 A-1	15,875	10,16	9,40	5,08	20,70	22,20	15,09	2,03	-----	2220	1,02
50-2	10 A-2					38,90	40,40			18,11	4440	2,00
50-3	10 A-3					57,00	58,50			18,11	6660	3,09
50-4	10 A-4					74,90	76,30			18,11	8892	4,06
50-5	10 A-5					93,10	94,40			18,11	11115	5,08
60-1	12 A-1	19,05	11,91	12,57	5,94	25,90	27,70	18,00	2,42	-----	3180	1,50
60-2	12 A-2					48,80	50,50			22,78	6360	2,92
60-3	12 A-3					71,50	73,30			22,78	9540	4,54
60-4	12 A-4					94,50	95,60			22,78	12688	6,03
60-5	12 A-5					117,50	118,40			22,78	15860	7,53

80-1	16 A-1					32,70	35,00			-----	5670	2,60
80-2	16 A-2					62,70	64,30			29,29	11340	5,15
80-3	16 A-3	25,40	15,88	15,75	7,92	91,70	93,60	24,00	3,25	29,29	17010	7,89
80-4	16 A-4					120,80	-----			29,29	22680	10,10
80-5	16 A-5					150,10	-----			29,29	28350	12,60
100-1	20 A-1					40,40	44,70			-----	8850	3,91
100-2	20 A-2					76,40	80,50			35,76	17700	7,80
100-3	20 A-3	31,75	19,05	18,90	9,53	112,20	116,30	30,00	4,00	35,76	26550	11,77
100-4	20 A-4					148,30	-----			35,76	35364	15,10
100-5	20 A-5					184,20	-----			35,76	44205	18,90
120-1	24 A-1					50,30	54,30			-----	12700	5,62
120-2	24 A-2					95,80	99,70			45,44	25400	11,70
120-3	24 A-3	38,10	22,23	25,22	11,10	141,40	145,20	35,70	4,80	45,44	38100	17,53
120-4	24 A-4					187,60	-----			45,44	50824	22,00
120-5	24 A-5					233,20	-----			45,44	63530	27,50
140-1	28 A-1					54,40	59,00			-----	17240	7,50
140-2	28 A-2					103,30	107,90			48,87	34480	15,14
140-3	28 A-3	44,45	25,40	25,22	12,70	152,20	156,80	41,00	5,60	48,87	51720	22,20
140-4	28 A-4					200,40	204,60			48,87	68932	28,10
140-5	28 A-5					249,10	253,30			48,87	86165	34,90
160-1	32 A-1					64,80	69,60			-----	22680	10,10
160-2	32 A-2					123,30	128,10			58,55	45360	20,14
160-3	32 A-3	50,80	28,58	31,55	14,27	181,80	186,60	47,80	6,40	58,55	68040	30,02
160-4	32 A-4					241,40	245,40			58,55	90712	38,60
160-5	32 A-5					300,30	304,30			58,55	113390	48,20
200-1	40 A-1					80,30	87,20			-----	35380	16,15
200-2	40 A-2					151,90	158,80			71,55	70760	32,24
200-3	40 A-3	63,50	39,68	37,85	19,85	223,50	230,40	60,00	8,00	71,55	106140	49,03
200-4	40 A-4					-----	299,80			71,55	141536	64,50
200-5	40 A-5					-----	371,40			71,55	176920	80,50
240-1	48 A-1					95,50	103,00			-----	51030	23,20
240-2	48 A-2					183,40	190,80			87,83	102060	45,23
240-3	48 A-3	76,20	47,63	47,35	23,81	271,30	278,60	72,39	9,50	87,83	153090	71,60
240-4	48 A-4					-----	366,50			87,83	204108	91,30
240-5	48 A-5					-----	454,30			87,83	255135	114,00