


Correntes de Placa Reta – norma ANSI

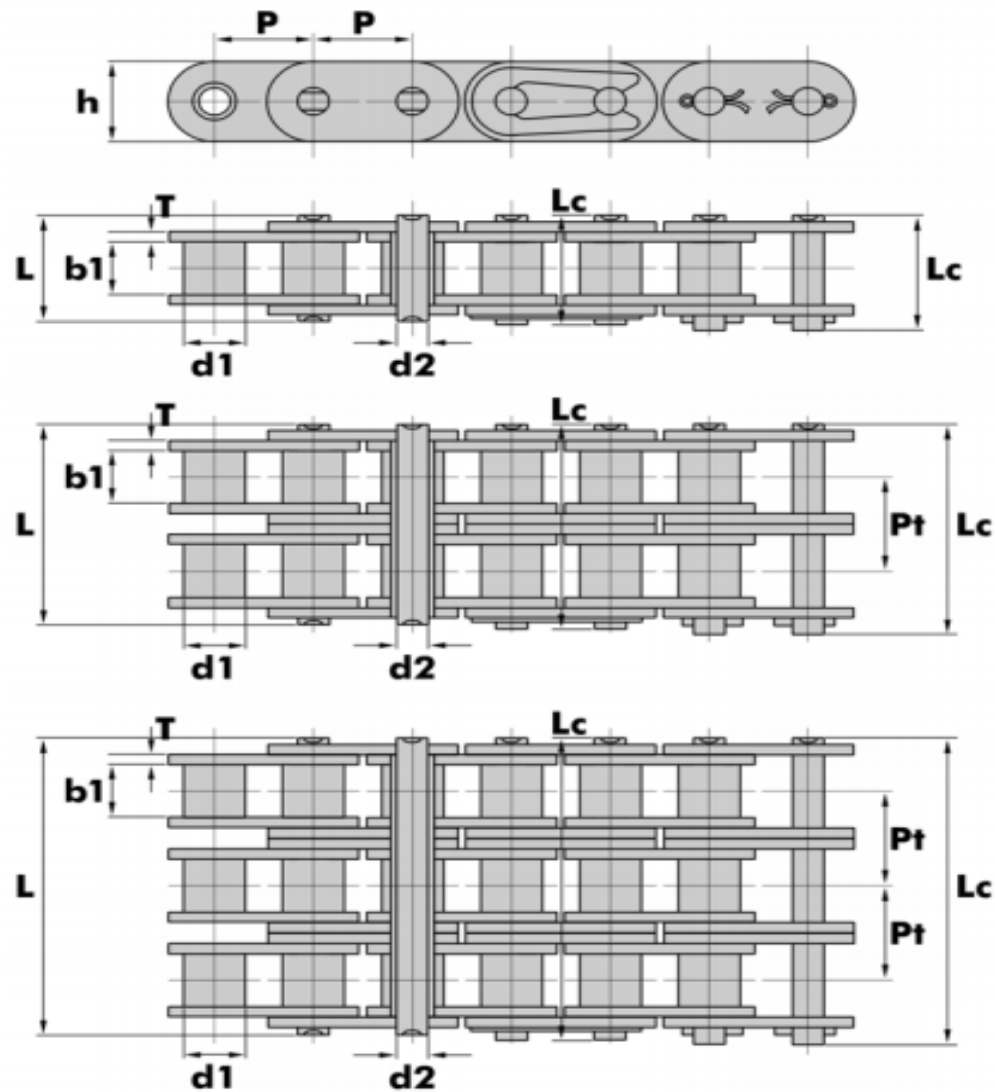

Dimensões em mm

Referência	Passo	Diâmetro do Rolo máx. d1	Largura entre Placas mfn. b1	PINO			PLACA		Passo Transversal Pt	Carga de Ruptura máx. kgf	Peso kg/m
				Diâmetro d2	Comprimento L	Comprimento Lc	Altura h	Espessura T			
ANSI C35	9,525	5,08	4,77	3,58	13,30	14,30	9,00	1,30	-----	790	0,41
C40-1 C40-2 C40-3	12,70	7,95	7,85	3,96	16,60 31,00 45,40	18,80 33,20 47,60	12,00	1,50	----- 14,38 14,38	1410 2820 4230	0,73 1,43 2,14
C50-1 C50-2 C50-3	15,875	10,16	9,40	5,08	20,70 38,90 57,00	23,30 41,40 59,50	15,09	2,03	----- 18,11 18,11	2220 4440 6660	1,23 2,42 3,62
C60-1 C60-2 C60-3	19,05	11,91	12,57	5,94	25,90 48,80 71,50	28,30 51,10 73,90	18,0/18,2	2,42	----- 22,78 22,78	3180 6360 9540	1,81/1,83 3,58/3,62 5,36/5,41
C80-1 C80-2 C80-3	25,40	15,88	15,75	7,92	32,70 62,70 91,70	36,50 65,80 95,10	24,00	3,25	----- 29,29 29,29	5670 11340 17010	3,09 6,12 9,10
C100-1 C100-2 C100-3	31,75	19,05	18,90	9,53	40,40 76,40 112,20	44,70 80,50 116,30	30,00	4,00	----- 35,76 35,76	8850 17700 26550	4,56 9,08 13,60
C120-1 C120-2 C120-3	38,10	22,23	25,22	11,10	50,30 95,80 141,40	54,30 99,70 145,20	35,70	4,80	----- 45,44 45,44	12700 25400 38100	6,86 13,60 20,43
C140-1 C140-2 C140-3	44,45	25,40	25,22	12,70	54,40 103,30 152,20	59,00 107,90 156,80	41,00	5,60	----- 48,87 48,87	17240 34480 51720	8,49 16,86 25,23
C160-1 C160-2 C160-3	50,80	28,58	31,55	14,27	64,80 123,30 181,80	69,60 128,10 186,60	47,80	6,40	----- 58,55 58,55	22680 45360 68040	11,50 22,90 34,19